


- Bore sizes Ø160 - Ø200mm
- Heavy duty tie rod design
- Magnetic piston as standard
- Options include:

**Tandem cylinders**

**Thru-rod cylinders**

**3 and 4 position cylinders**

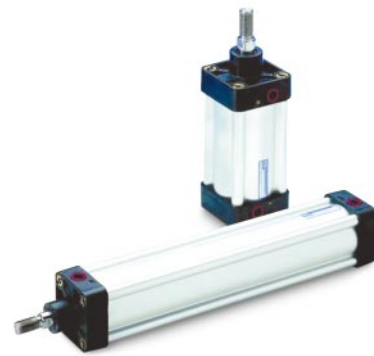

## Operating information

Working pressure: Max 10 bar  
 Seal / Temperature options:  
 Standard: -20°C to +70°C

For technical information see CD

### Materials used:

End caps and cylinder tube Aluminium  
 Piston rod Hard chrome plated  
 Piston Aluminium  
 Seals Nitrile rubber NBR

## Tie rod cylinders - Double acting, magnetic piston, male piston rod thread

### Ø160mm - (G<sup>3/4</sup>)

Stroke mm	Order code
25	C41-T160MC-0025
50	C41-T160MC-0050
80	C41-T160MC-0080
100	C41-T160MC-0100
125	C41-T160MC-0125
160	C41-T160MC-0160
200	C41-T160MC-0200
250	C41-T160MC-0250
320	C41-T160MC-0320
400	C41-T160MC-0400
500	C41-T160MC-0500

### Ø200mm - (G<sup>3/4</sup>)

Stroke mm	Order code
25	C41-T200MC-0025
50	C41-T200MC-0050
80	C41-T200MC-0080
100	C41-T200MC-0100
125	C41-T200MC-0125
160	C41-T200MC-0160
200	C41-T200MC-0200
250	C41-T200MC-0250
320	C41-T200MC-0320
400	C41-T200MC-0400
500	C41-T200MC-0500

## Cylinder mountings

### Swivel rod eye - ISO 8139

Cyl.Ø	Order code
160	P1C--4SRS
200	P1C--4SRS

### Clevis - ISO 8140

Cyl.Ø	Order code
160	P1C-4SRC
200	P1C-4SRC

### Clevis bracket MP2

Cyl.Ø	Order code
160	9121644708
200	9121644709

### Clevis bracket MP4

Cyl.Ø	Order code
160	9121644608
200	9121644609

### Swivel rod bracket

Cyl.Ø	Order code
160	9121568608
200	9121568609

## Combinations

### Clevis bracket MP4 + MP2

Cyl.Ø	MP4	MP2
160	9121644608	9121644708
200	9121644609	9121644709

### Flange MF1 and MF2

Cyl.Ø	Order code
160	9121644908
200	9121644909

### Foot bracket MS1

Cyl.Ø	Order code
160	9121644808
200	9121644809

### Piston rod nut

Cyl.Ø	Order code
160	9128985606
200	9128985606

### Bearing bracket

Cyl.Ø	Order code
160	9121569307
200	9121569308

## Sensors for C41

### Reed sensors

Cable m	Voltage V AC/DC	Order code
3	10 - 250	9126344301
10	10 - 250	9126344302
*		9126344309

### Electronic sensors

Cable m	Voltage V AC/DC	Order code
3	10 - 30	9126344321
10	10 - 30	9126344322
*		9126344329

\* Cable must be ordered separately.

### Mountings for sensors

For bore size	Order code
160 - 200	9126344362

### Cables for sensors

Length	Cable	Order code
3m	Flex PVC	9126344341
10m	Flex PVC	9126344342
3m	Super Flex PVC	9126344343
10m	Super Flex PVC	9126344344
3m	Polyurethan	9126344345
10m	Polyurethan	9126344346