




## GOODYEAR CL Belt Specification

16.03.2011

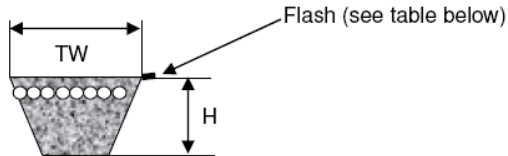

SECTION					<i>in section</i>	<i>Fabric</i>
SPZ	9.5	+/-0.5	8	+1/0	3*3/5	CR treated
SPA	12.5	+/-0.5	11	+1/0	5*3/6	CR treated
SPB	16.3	+/-0.5	14.5	+1/0	8*3/6	CR treated
SPC	21.5	+1/-0,5	18.7	+1/0	12*3/7	CR treated
Z	10	+0.5/-1.0	6	+1/-0.5	2*3/6	CR treated
A	13	+0.5/-1.0	8	+1/-0.5	3*3/7	CR treated
B	17	+0.5/-1.0	11	+1/-0.5	5*3/7	CR treated
C	22	+0.5/-1.0	14	+1/-0.5	8*3/8	CR treated
D	32	+0.5/-1.0	19	+1/-0.5	12*3/10	CR treated

<b>1. Branding:</b>	Narrow	GOODYEAR CL Size (Lp)	oil resistant	62 + traceability
	Example:	<b>GOODYEAR CL SPA 1000</b>	oil resistant	<b>62 + traceability</b>
	Classical	GOODYEAR CL Size Imperial / Li / Ld	oil resistant	62 + traceability
	Example:	<b>GOODYEAR CL A40 / 13X1016Li / A 1046Ld</b>	oil resistant	<b>62 + traceability</b>

<b>2. Length (overall):</b>	Narrow	Lp as measured on measuring machine to meet ISO 4184 tolerance
	Classical	Lp converted from Imperial size to meet ISO 4184 tolerance

<b>3. Matching sets:</b>	Matching sets according to ISO 4184 on all ring cure produced belts.
--------------------------	--

<b>4. Visual appearance:</b>	Smooth surface without spots and wrinkles	
	Readable branding according to branding specs.	
	Max. allowed flashes on the edge	
	SPZ, Z, SPA, A	0,3mm
	B, SPB, C, SPC	0,4 mm
	D	0,5 mm

Boštjan Perdan  
Technical Service Manager - IND PTP

*Perdan*

**GOODYEAR**  
ENGINEERED PRODUCTS

VEYANCE TECHNOLOGIES EUROPE, d.o.o.  
Skofjeloška cesta 6, 4000 Kranj  
Slovenija

14